



Can through diameter  
Max  $\phi 24.5\text{mm}$ (1")

Work Lamp are easy to install and offer a flexible solution for temporary lighting. Ceiling installation is not recommended.

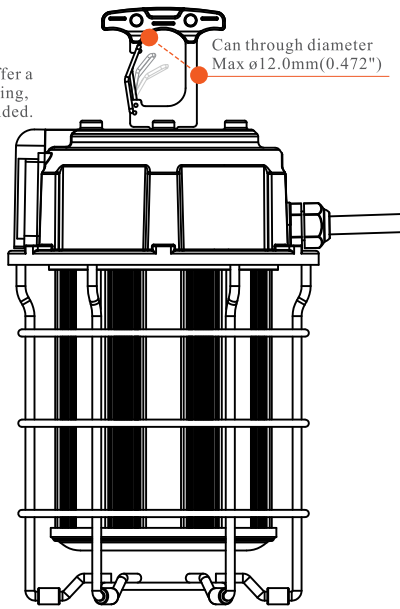

Can through diameter  
Max  $\phi 12.0\text{mm}$ (0.472")

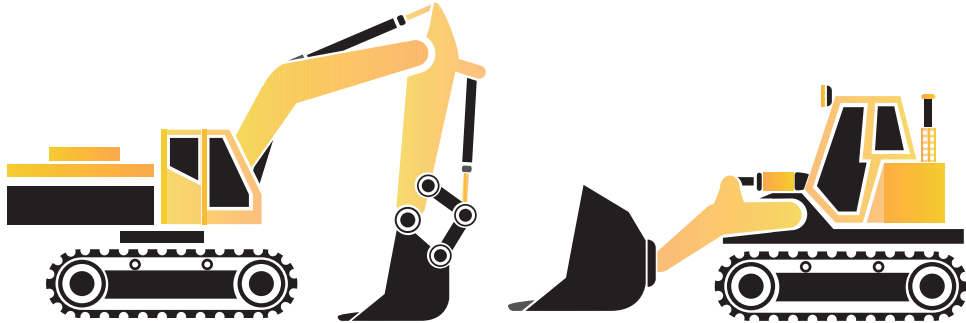

**CAUTIONS**


- Suitable for damp locations.
- Risk of electric shock. Do not use where directly exposed to water.
- Do not use with dimmers.
- Don't take apart the lamps without our permit.

**You Lumi**<sup>®</sup>

www.youlumi.com

**YL-WL18 series**  
**80W/100W/120W/150W**


**LED-WORK LAMP**

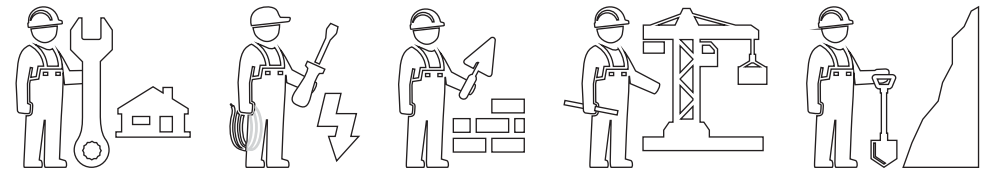

SHENZHEN YOULUMI CO.,LTD




# YL-WL18 series

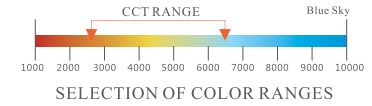

Security chain  
Can be locked on the cage to prevent falling.

Humanized Portable handle  
Total stainless steel, corrosion resistance.

The black part is the socket, another light can be plugged in to form a string light.

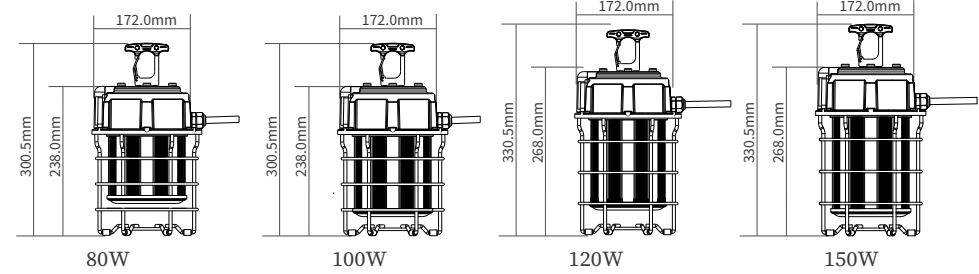

Reliable lifespan  
> 50,000 hours



Surge protection  
IR Remote control 4KV  
Non-IR 6KV



Flame retardant  
material



Waterproof design



REPLACE

80W	250W	120W	500W
100W	400W	150W	600W



SJTW 18AWG\*3C  
1.5M(5ft) Power Cord with Plug  
Custom length of Please inquire.



## Specifications

Model No.	AC Input	Wattage	PF	THD	LED Qty	CRI	Lumen±5%	CCT.	Dimensions	Weight
YL-WL18-80W-M-xxK	100-277VAC 50/60Hz	80W±10%	≥0.9	<20%	304 PCS SMD2835	≥80	11,200 lm	2700-6500K	ø172*300.5mm ø6.77*11.83"	NW 2.25kg 4.96 lbs
YL-WL18-100W-M-xxK	100-277VAC 50/60Hz	100W±10%	≥0.9	<20%	368 PCS SMD2835	≥80	14,000 lm	2700-6500K	ø172*300.5mm ø6.77*11.83"	NW 2.38kg 5.25 lbs
YL-WL18-120W-M-xxK	100-277VAC 50/60Hz	120W±10%	≥0.9	<20%	432 PCS SMD2835	≥80	16,800 lm	2700-6500K	ø172*330.5mm ø6.77*13.01"	NW 2.55kg 5.62 lbs
YL-WL18-150W-M-xxK	100-277VAC 50/60Hz	150W±10%	≥0.9	<20%	480 PCS SMD2835	≥80	21,000 lm	2700-6500K	ø172*330.5mm ø6.77*13.01"	NW 2.66kg 5.86 lbs

\* 'M' stands for Input 100-277V AC.

\* 'xxK' stands for color temperature, Example: '50K' stands for 5000K( Kelvin Temperatures may vary +/- 250K).

\* DLC not available for all CCT. Please inquire.

## Packing

Model No.	Inner box size	Weight	Carton size	Per Carton
YL-WL18-80W-M-xxK	175*175*270mm 6.89*6.89*10.63"	GW 2.53kg 5.58 lbs	365*365*H285mm 14.37*14.37*11.22"	4pcs GW10.77kg/23.74 lbs
YL-WL18-100W-M-xxK	175*175*270mm 6.89*6.89*10.63"	GW 2.66kg 5.86 lbs	365*365*H285mm 14.37*14.37*11.22"	4pcs GW11.29kg/24.89 lbs
YL-WL18-120W-M-xxK	175*175*300mm 6.89*6.89*11.81"	GW 2.84kg 6.26 lbs	365*365*H315mm 14.37*14.37*12.4"	4pcs GW12.02kg/26.50 lbs
YL-WL18-150W-M-xxK	175*175*300mm 6.89*6.89*11.81"	GW 2.95kg 6.50 lbs	365*365*H315mm 14.37*14.37*12.4"	4pcs GW12.46kg/27.47 lbs

\* Each lamp is equipped with annex: Security chain and IR Remote control.

\* Power cord lengthened need to increase the size of the package.

